




Generation Deactivation Notification Update

Transmission Expansion Advisory Committee
September 6, 2022



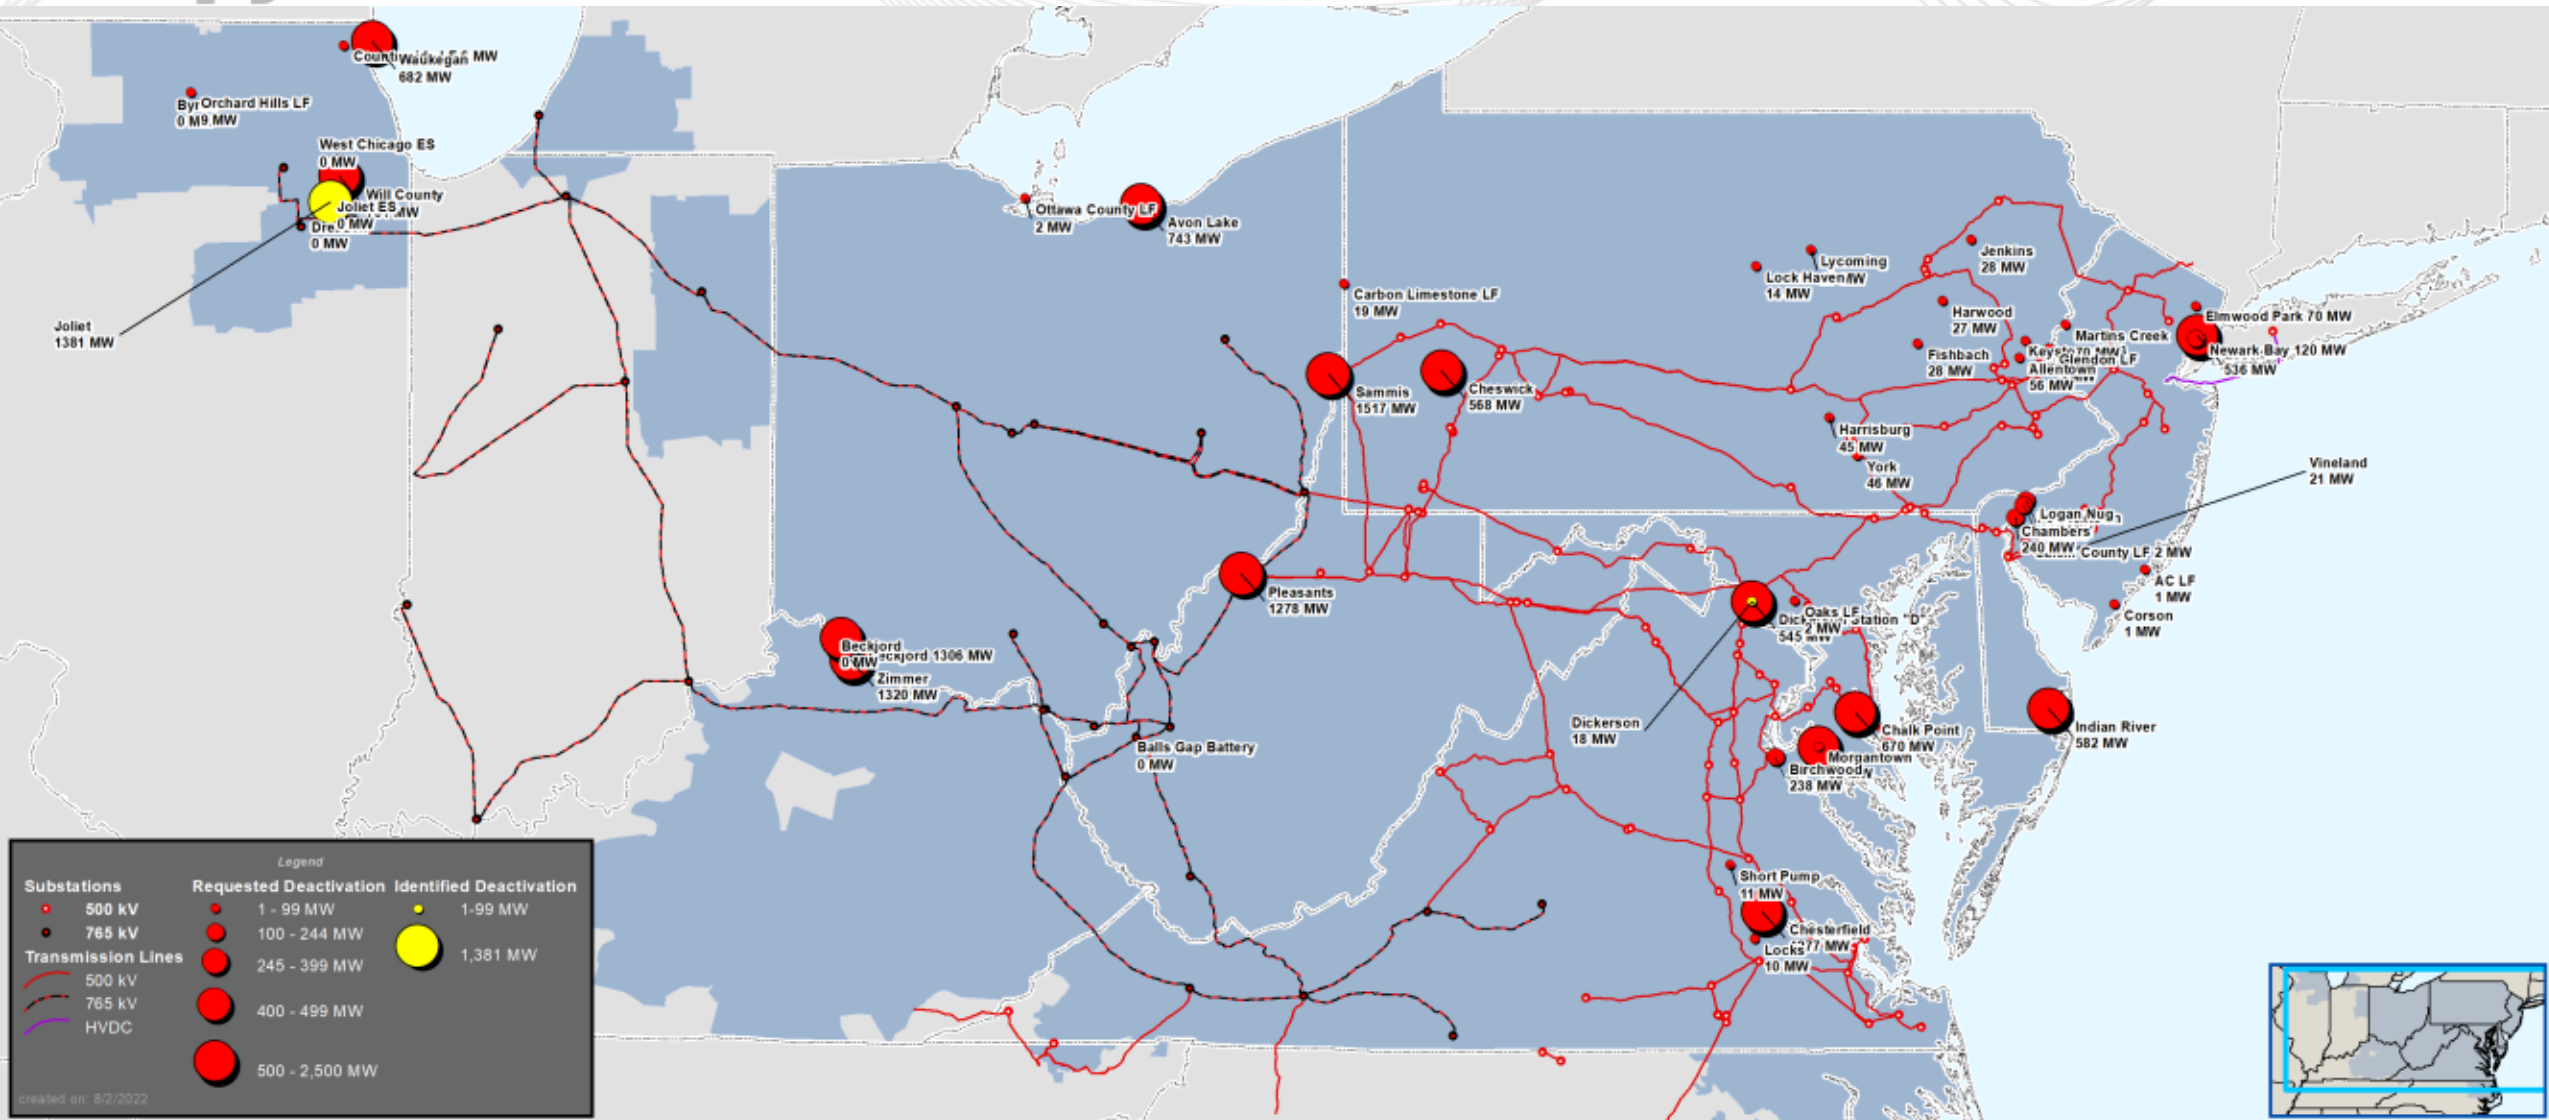

Deactivation Status

| Unit(s) | Transmission Zone | Requested Deactivation Date | PJM Reliability Status |
|-----------------------------|-------------------|-----------------------------|--|
| Joliet 6,7, and 8 - 1381 MW | ComEd | 6/1/2023 | Reliability analysis complete. No violation identified. The units can be deactivated as scheduled. |
| Dickerson CT | PEPCO | 10/23/2022 | Reliability analysis complete. No violation identified. The unit can be deactivated as scheduled. |


Second Read

Cheswick Deactivation - 567.5 MW

- The unit was deactivated on 03/31/2022.
- The study results and associated baseline projects were presented on 08/10/2021.
- The missing N-1-1 thermal violations driven by Cheswick deactivation were identified during the review of the analysis results with 2023 summer and 2027 summer load flow models developed in 2022.
- The further investigation confirmed that there was the issue in the study file used for the N-1-1 thermal analysis performed in 2021.

Problem Statement:

- Thermal violation:
 - Collier - Elwyn #1 138 KV
 - Collier - Elwyn #2 138 KV
 - Forbes - Oakland 138 KV
 - Carson - Oakland 138 KV
- Contingency: Various N-1-1

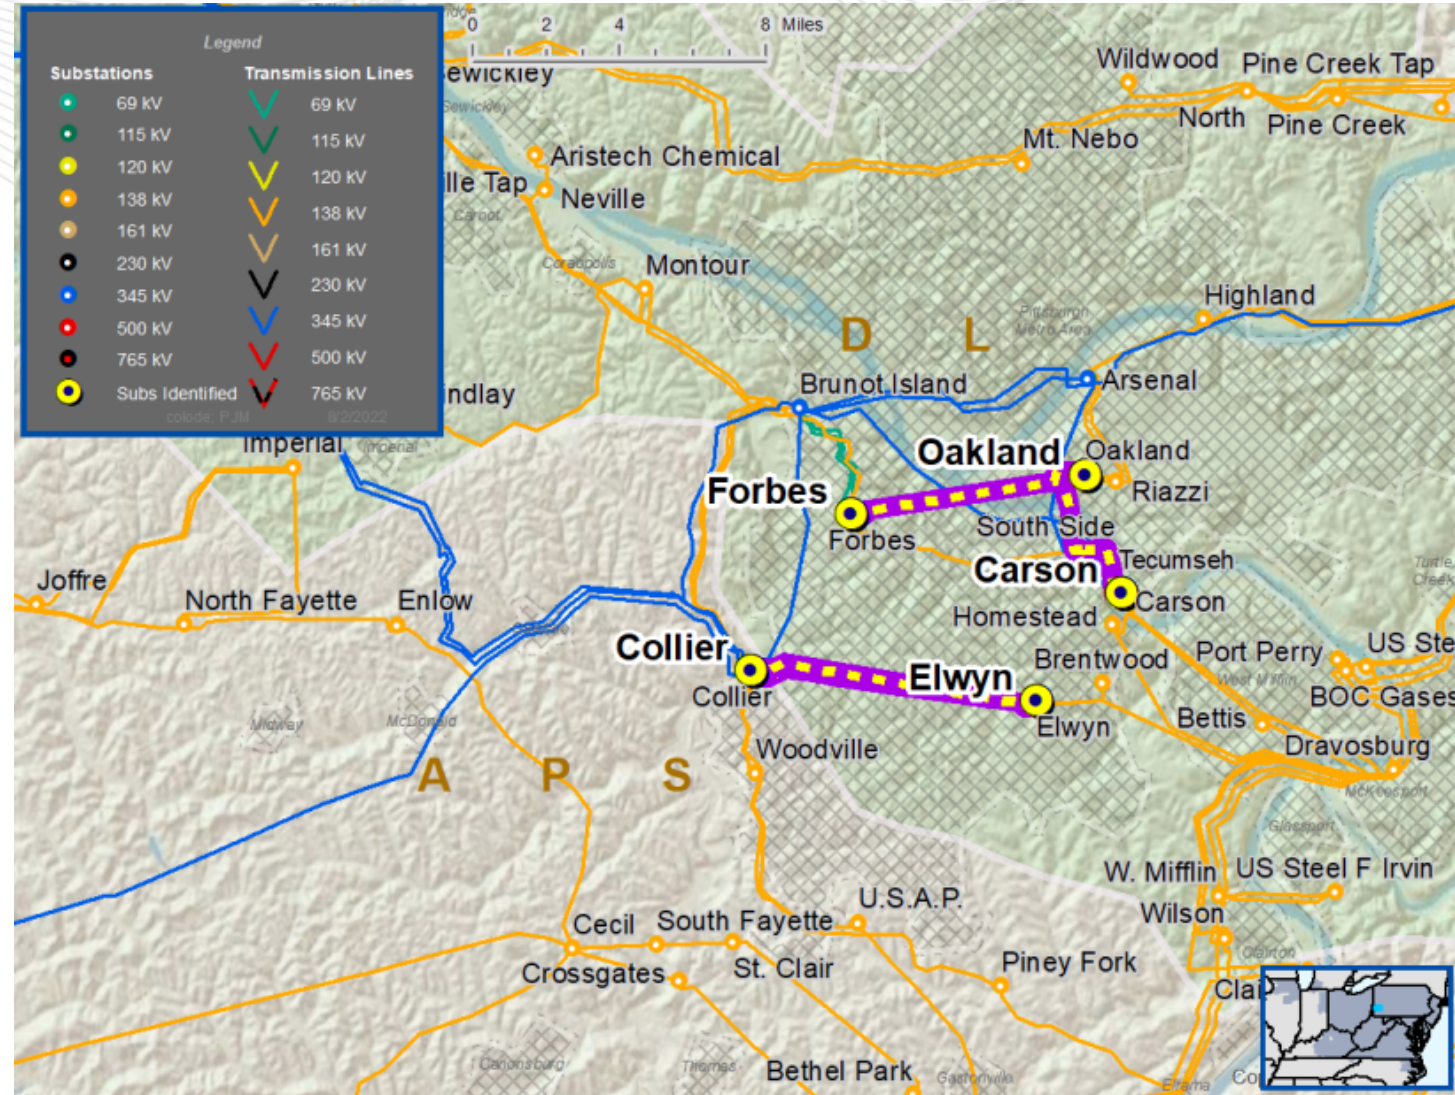

Recommended Solution

B3717.1: Install a series reactor on Cheswick - Springdale 138 kV line.


B3717.2: Transmission Line Rearrangement

- Replacement of four structures and reconductor DLCO portion of Plum – Springdale 138 kV line.
- Associated communication and relay setting changes at Plum and Cheswick.
- Current Rating: 220 MVA SN/ 248 MVA SE
- New Rating: 288 MVA SN/ 343 MVA SE

Projected ISD: 12/31/2024*

Estimated Cost: B3717.1 - \$9M, B3717.2: \$15M

* Operating measures identified to mitigate reliability impacts in interim.

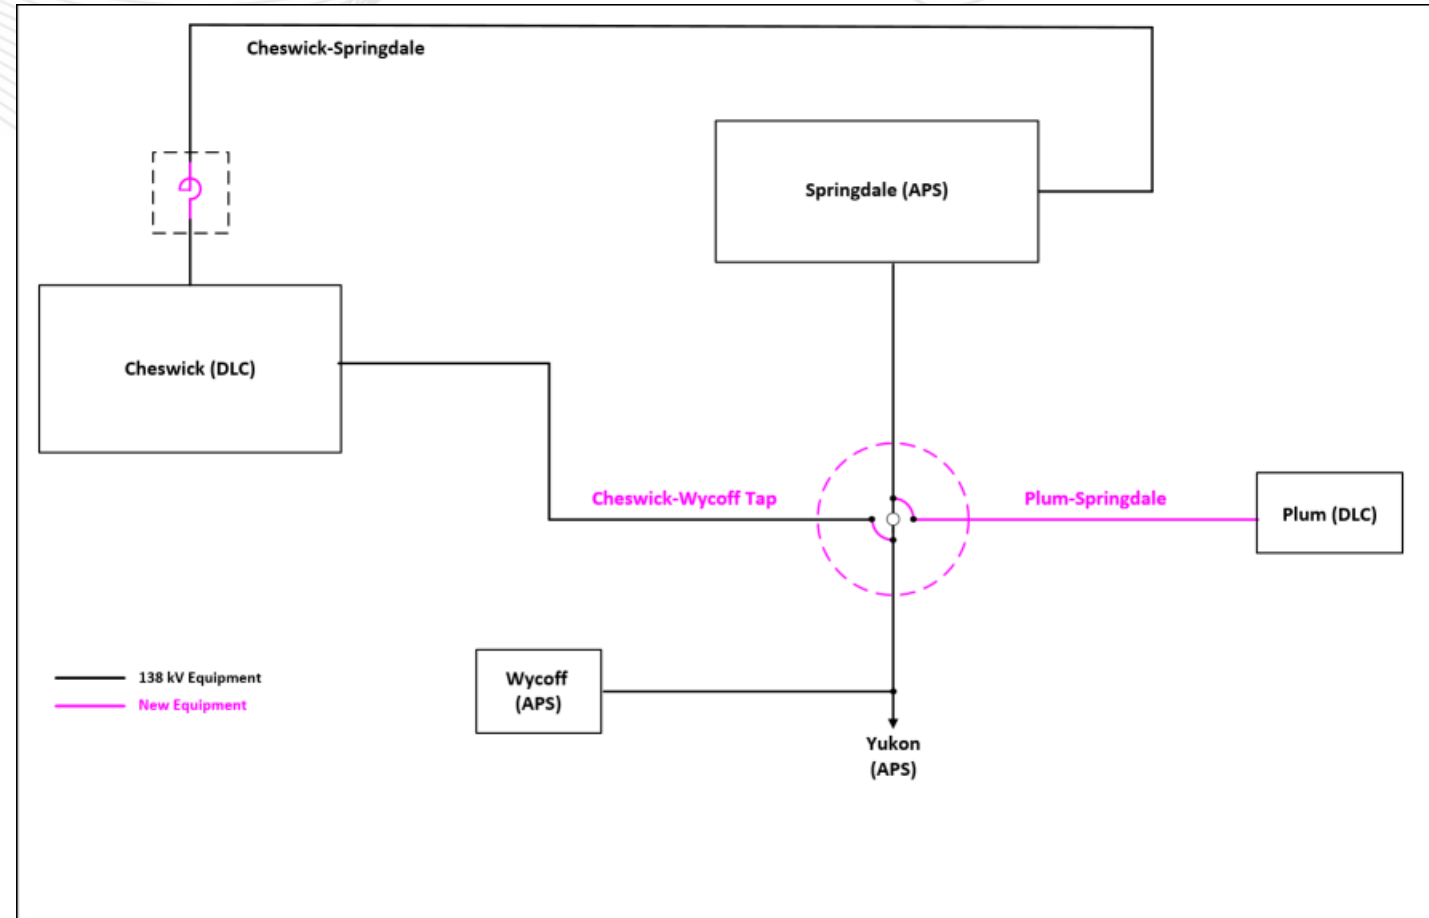

Facilitator:
Sue Glatz,
Suzanne.Glatz@pjm.com

Secretary:
Michael Zhang,
Michael.Zhang@pjm.com

SME/Presenter:
Phil Yum,
Phil.Yum@pjm.com

Generation Deactivation Notification



Member Hotline

(610) 666 – 8980

(866) 400 – 8980

custsvc@pjm.com



Revision History

V1 - 09/01/22 - Original slides posted.

**PROTECT THE
POWER GRID**
**THINK BEFORE
YOU CLICK!**



Be alert to
malicious
phishing emails.

Report suspicious email activity to PJM.
(610) 666-2244 / it_ops_ctr_shift@pjm.com

