


# Updates to Regional Transmission and Energy Scheduling Practices

Christopher Pacella,  
Sr. Lead Analyst, Transmission Service Dept.  
Market Implementation Committee  
August 11, 2021

Next month, the MIC will be asked to endorse updates to the PJM Regional Transmission and Energy Scheduling Practices

- Minor clarifications related to the 2019 OASIS Refresh project
- Minor updates as part of a general review
- Updates related to the North American Energy Standards Board's (NAESB) Wholesale Electric Quadrant (WEQ) v3.2 Business Practice Standards – effective October 27, 2021

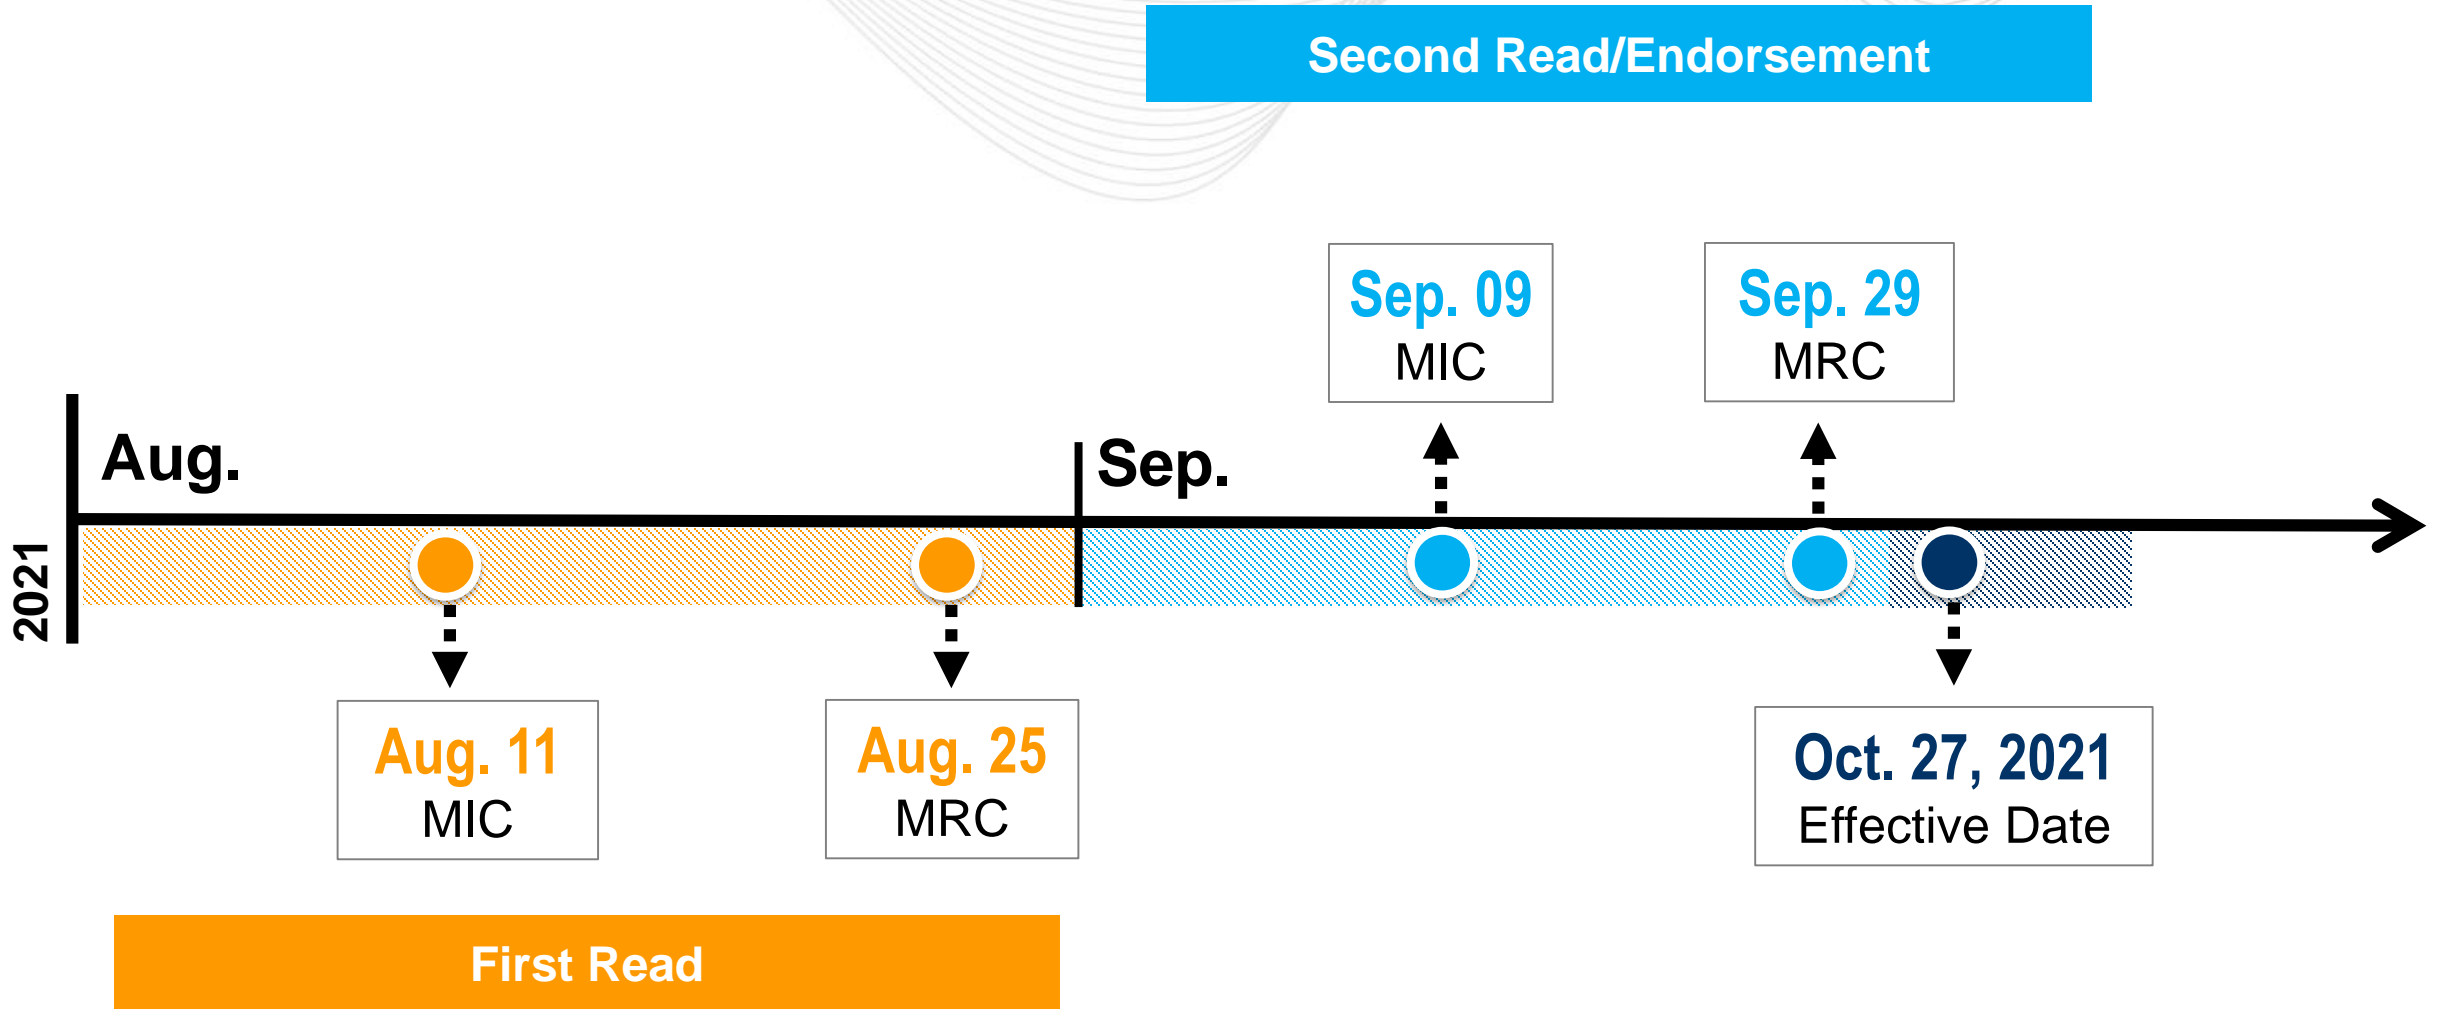

- **Review of Non-Impactful Regional Practices Modifications**
- Review of Impactful Regional Practices Modifications
  - PJM's Response to the Preemption Requirements
  - Review of Preemption-related Regional Practices Modifications

## General Updates

- New definitions added
- Quality review/cleanup - fixed outdated references and streamlined business practice language
- Removed duplicate language already captured in other PJM Manuals and governing documents (Sections 1.3, 1.3.2.3, 1.3.2.4, 1.5.1, and 1.17)
- Split a single set of Redirect language in the Short-term Firm section to separate language for both the Long-term Firm and Short-term Firm sections (Sections 1.2.5 and 1.3.2)
- Expanded introduction to Short-Term Non-Firm Point-to-Point section (Section 1.4)

## Transmission Service Timings (Section 1.6)

- Added Spot-In Product Customer Confirmation deadline
- New Footnotes:
  - Clarified that the Latest Request time can be earlier than stated when the resulting Customer Confirmation deadline falls after the start of service
  - Described when different Customer Confirmation deadlines apply
  - Clarified that the Spot-In Automatic Release of Service deadline switches between “Day Before” and “Day Of” at 23:00 EPT, one day prior to the start of service

## Documenting Current Practices

- Added the Network Firm Load Transmission Product (Sections 1.1.3 and 1.5.5)
- Clarified that PJM rejects REBID requests (Sections 1.1.5, 1.14, and 1.15)
- Specified that Long-term Firm (LTF) requests must start on the first day of the month (Section 1.2)
- Clarified that PJM does not permit waiving rollover rights (Section 1.2.1)
- Clarified actions taken for PJM-initiated deferrals of LTF requests (Section 1.2.4)
- Clarified that LTF requests may preempt monthly Short-term Firm (STF) reservations and that PJM respects the Congestion Management Process Master Document when evaluating STF requests (Section 1.3)
- Specified that the Resale transaction OFFER\_INCREMENT must match the SERVICE\_INCREMENT (Section 1.12.1)

## Documenting Current Practices

- Clarified that Pre-Confirmed status is not required for Renewals (Section 1.13)
- Clarified when service annulments are permitted and how requests for early terminations are evaluated (Section 1.20)
- Clarified that Coordinated Requests must have the type “ORIGINAL” (Section 1.22.1)
- Clarified when Transmission Customers can request the reduction of a Coordinated Request (Section 1.22.2)
- Specified that PJM implements interchange scheduling on a 15-minute interval granularity (Section 2.2.2)
- Clarified that Transmission Service Sharing Requests are now accommodated via the ExSchedule tool (Section 2.2.7)



- Review of Non-Impactful Regional Practices Modifications
- **Review of Impactful Regional Practices Modifications**
  - **PJM's Response to the Preemption Requirements**
  - **Review of Preemption-related Regional Practices Modifications**

- Quick Fix solution separate from NAESB 3.2 compliance filing
  - Modifies the PJM Tariff via 205 Filing to exclude non-firm preemption entirely - preferred outcome
  - Operating Committee Presentation - July 15, 2021
  - Markets Reliability Committee / Members Committee Presentations – July 28, 2021
- NAESB 3.2 compliance filing (filed with FERC on July 27, 2021)
  - Stakeholder notification at MC Webinar - June 21, 2021
  - Streamlined implementation of the Preemption-ROFR process if PJM's preferred option is not successful
  - **Implementation requires new Regional Practices language**

## Transmission Service Timings (Section 1.6)

- NAESB modified the applicability of Customer Confirmation deadlines
  - Existing deadlines:
    - For service reserved **day-ahead**, the customer has 30 minutes
    - For service reserved in **real-time**, the customer has 5 minutes
  - New deadlines (regardless of PJM's 205 filing outcome):
    - For service reserved **more than 8 hours prior to start**, the customer has 30 minutes
    - For service reserved **within 8 hours prior to start**, the customer has 5 minutes

## Preemption Deadlines

- **Short-term Firm (STF)** service becomes ineligible for preemption at 09:00 EPT, one day prior to the start of service (Section 1.3)
- **Non-Firm PTP** service becomes ineligible for preemption at 13:00 EPT, one day prior to the start of service (Section 1.4.1)

## Preemption Types

- **ACCEPTED Preemption** (existing rules – Sections: 1.3, 1.4.1.1, 1.5.2, and 1.5.3 )
- **CONFIRMED Preemption, without Right of First Refusal (ROFR)** (Sections: 1.2.5.1, 1.3.2.1, 1.4.1.2, and 1.5.2)
- **CONFIRMED Preemption, with ROFR** (Section 1.4.1.3)

## PJM-specific Preemption-ROFR Process

- Only hourly Non-Firm PTP reservations will have ROFR (Section 1.4.1)
- ROFR Defenders (Section 1.4.1.3)
  - Defenders must submit ROFR profiles in advance of preemption events
  - ROFR profiles can be created/modified up until the preemption deadline
  - Defenders may decline exercising ROFR by specifying a 0 MW profile
  - PJM performs ROFR evaluation instantaneously upon submission of a Challenger request
  - PJM will add matching intervals before and after the existing Defender profile in an attempt to overlap and match the Challenger

SME/Presenter:  
Chris Pacella

[christopher.pacella@pjm.com](mailto:christopher.pacella@pjm.com)

Facilitator:  
Lisa Morelli,

[lisa.morelli@pjm.com](mailto:lisa.morelli@pjm.com)

Secretary:  
Nick DiSciullo,

[nicholas.disciullo@pjm.com](mailto:nicholas.disciullo@pjm.com)

## **Regional Transmission and Energy Scheduling Practices Updates**



### **Member Hotline**

(610) 666 – 8980

(866) 400 – 8980

[custsvc@pjm.com](mailto:custsvc@pjm.com)

# Updates to Regional Transmission and Energy Scheduling Practices: **Supporting Materials**

- **Transmission Service evaluation delays**
  - Non-firm evaluation engine processes requests instantaneously
  - Preemption-ROFR introduces unmanageable delay potential
    - More than 2 hours for hourly Challenger requests
    - More than 24 hours for daily Challenger requests
  - Delays compound when multiple preemption events queued
- **OASIS customer uncertainty**
  - Hourly Transmission Service at greatest risk of preemption
    - 2018-2020 over 90% of 45,000+ confirmed reservations were hourly
  - Preemption of service near Start Time exacerbates uncertainty
    - 2018-2020, 90% of reservations granted within 24 hours of Start Time, and 97% granted within 48 hours of Start Time



- **Day Ahead Market and Real-time impacts**
  - Delays in evaluating Transmission Service requests could impact timing of Day Ahead Market bid submissions
  - Preemption of confirmed service used to support Day Ahead bid could prevent customer from fulfilling position in real-time
  - Preemption of service used to support interchange schedule will result in transaction curtailment
    - Preemption-ROFR processing delays will also delay PJM's ability to issue timely curtailments
      - Less time for customers to react
      - Potential for operational impacts

- “Preemption and Right of First Refusal (ROFR)” translates to Transmission Service competition based on service duration
  - **Challenger**: new request for Transmission Service, but insufficient posted capacity
  - **Defender**: existing reservation of shorter duration with respect to the Challenger
  - **ROFR**: right of Defender to keep service by matching Challenger
- New Preemption-ROFR requirements included in North American Energy Standards Board (NAESB) version 3.2 Business Practice Standards
  - WEQ-001-025 defines detailed timing and implementation

There is insufficient ATC at 05:00 to grant 50 MW of service to the Challenger

## No Preemption

	00:00	01:00	02:00	03:00	04:00	05:00	06:00	07:00	08:00	09:00
<b>Challenger</b>					50 MW					
<b>Defender</b>			100 MW							

Since the Challenger has a shorter duration than the Defender, no preemption occurs

## ACCEPTED Preemption (existing rules)

	00:00	01:00	02:00	03:00	04:00	05:00	06:00	07:00	08:00	09:00
<b>Challenger</b>			50 MW							
<b>Defender</b>			100 MW							

Since the Defender has not Confirmed their service, a Challenger of equal duration can preempt 50 MW from the Defender at 05:00

There is insufficient ATC at 05:00 to grant 50 MW of service to the Challenger

## CONFIRMED Preemption Without Right of First Refusal

	00:00	01:00	02:00	03:00	04:00	05:00	06:00	07:00	08:00	09:00	
<b>Challenger</b>		50 MW									
<b>Defender</b>			100 MW								

Since the Defender does not have ROFR, a Challenger of longer duration can preempt 50 MW from the Defender at 05:00

## CONFIRMED Preemption With Right of First Refusal

	00:00	01:00	02:00	03:00	04:00	05:00	06:00	07:00	08:00	09:00	
<b>Challenger</b>		50 MW									
<b>Defender</b>		50 MW	100 MW					50 MW			

Since the Defender has ROFR, additional service can be purchased to match a Challenger of longer duration, which avoids preemption

## Common Changes

- Sections 1.3 and 1.4.1
  - Challengers must have a single capacity value for the duration of the request in order to initiate preemption
  - Challengers may opt-out of initiating preemption
  - Defenders are ranked and processed per the NAESB requirements
  - PJM will attempt to restore capacity preempted from Defenders
- Sections 1.4.1.2 and 1.4.1.3
  - ROFR Defenders prevented from matching due to capacity shortages will not be preempted
  - Preempted customers are responsible for reconciling impacted Day-ahead Bids, Tags, Resales, and Consolidation requests

## ACCEPTED Preemption

- **Short-term Firm (STF) service** (Section 1.3)
  - STF requests in ACCEPTED status may be preempted by Pre-Confirmed requests of equal duration (existing rule)
- **Non-Firm Network service** (Section 1.5.2)
  - Network requests in ACCEPTED status may be preempted by Pre-Confirmed requests of equal duration (existing rule)
- **Non-Firm PTP service**
  - Defenders in ACCEPTED status may be preempted by: (Section 1.4.1.1)
    - Pre-Confirmed Network requests regardless of duration (existing rule)
    - Pre-Confirmed PTP requests of equal or longer duration (existing rule)

## ACCEPTED Preemption (cont)

- **Spot-In service** (Section 1.5.3)
  - Defenders in ACCEPTED status may be preempted by:
    - Pre-Confirmed Network requests regardless of duration (existing rule)
    - Pre-Confirmed PTP requests of equal or longer duration (existing rule)
    - Pre-Confirmed Spot-In requests of equal or longer duration (existing rule)

## CONFIRMED Preemption, without ROFR

- **Non-Firm PTP Redirects**

- Defenders in CONFIRMED status may be preempted by Pre-Confirmed Network, Point-to-Point (PTP), and Spot-In requests, regardless of duration

(Sections 1.2.5.1 and 1.3.2.1)

- **Non-Firm PTP service**

- Defenders in CONFIRMED status, without ROFR, may be preempted by:

(Section 1.4.1.2)

- Pre-Confirmed Network requests regardless of duration
- Pre-Confirmed PTP requests of longer duration



## CONFIRMED Preemption, without ROFR (cont)

- **Spot-In service** (Section 1.5.3)
  - Defenders in CONFIRMED status may be preempted by:
    - Pre-Confirmed Network requests regardless of duration
    - Pre-Confirmed PTP requests of longer duration
    - Pre-Confirmed Spot-In requests of longer duration

## CONFIRMED Preemption with ROFR

- Defenders in CONFIRMED status, with ROFR, may be preempted by: (Section 1.4.1.3)
  - Pre-Confirmed PTP requests of longer duration when Defender is unwilling to match Challenger duration via ROFR